
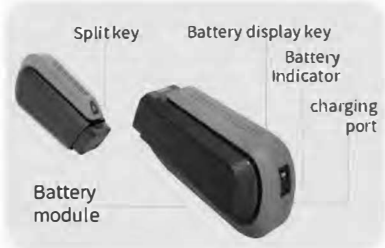


SK007A Handheld portable endoscope



PRODUCT TECHNICAL
PARAMETERS

Host	
Display	5" HD large screen
Dimension	350*155*59mm
Output	TF card slot, HDMI interface, MicroUSB
Power	Modular battery, Use ≥ 4 hours
IP Grade	IP54
Operating temperature	-10°C~50°C, Low temperature without preheating
Storage Temperature	-20°C~60°C
Relative Humidity	Max 90%, No condensation
Storage card	TF card 32GB(Other optional)

Camera Probe	
Probe Diameter	1.2mm~8mm
Pixel	≥ 1.0MP
Length	1~10m(other customized)
Articulation	360° full way articulation
Max swing head Angle	≥ 180°
DOF	3mm~30mm/3mm~70mm/7~150mm/12~200mm/50~infinity
FOV	90°/120°/140° optional
Viewing angle	Front view
Illumination	Front LED highlight light
Operating Temperature	-20°C~70°C
IP Grade	IP67

System / software	
Image / video format	Image: JPEG(JPG), Video: AVI
Image control	Freezing, zooming, photographing, flipping, video playback and analog ruler functions
System language	Chinese, English, German, French, Russian, Spanish, Japanese and customized